



LOC	DIST	REVISIONS					
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E1	REVISED PER ECO-11-005027	14MAR2011	RK	HMR
			F	REV PER ECO-12-012918	16JUL2012	JM	JB

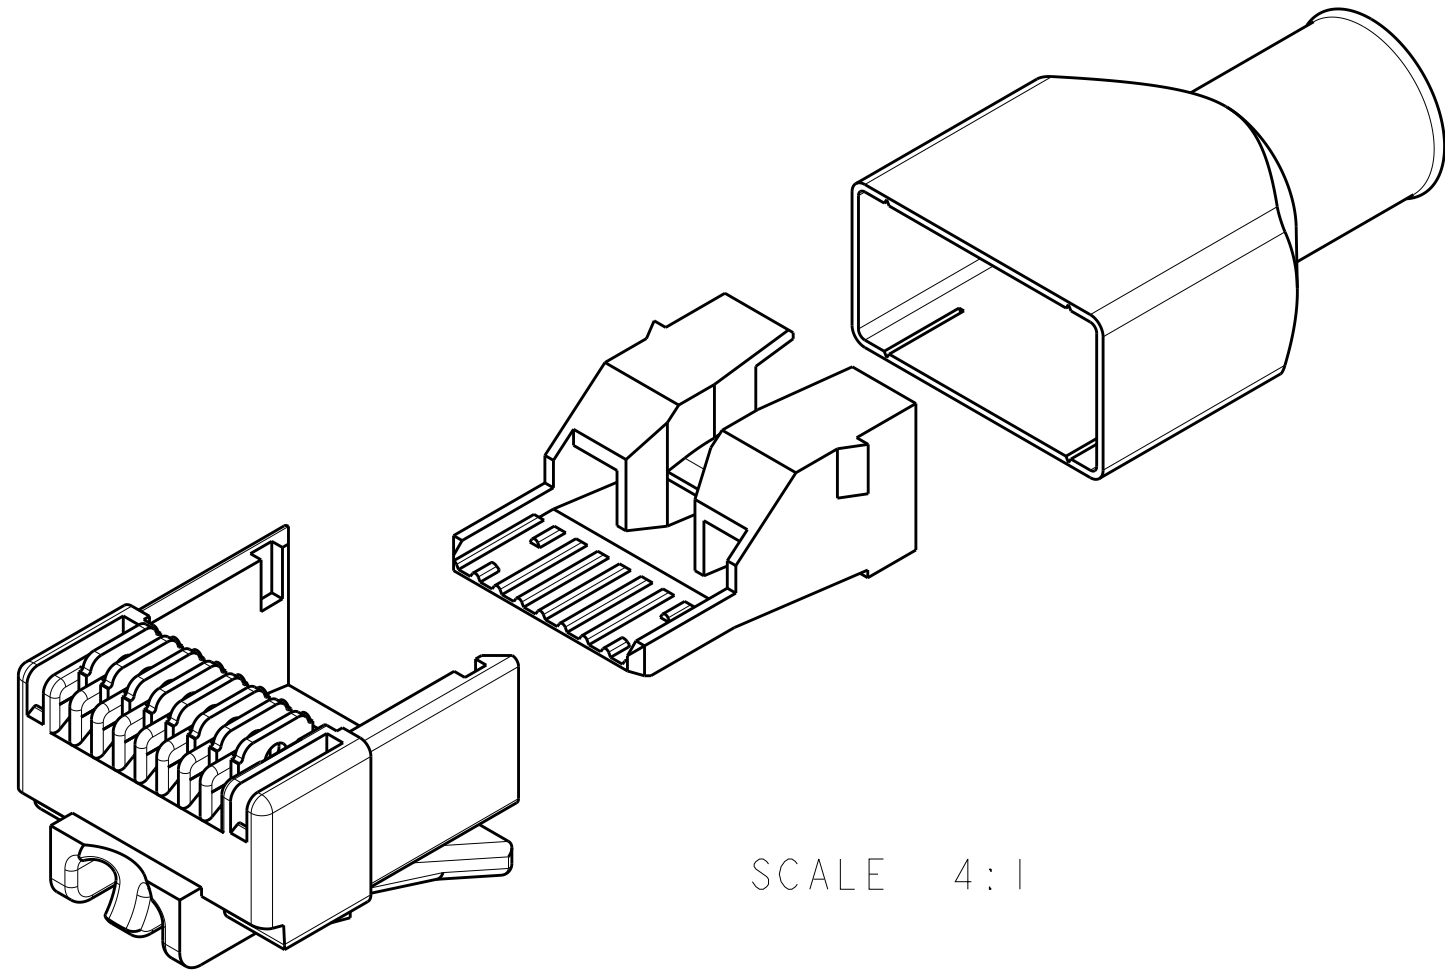

1. MATERIAL: HOUSING - 94V-0 RATED POLYCARBONATE CLEAR TERMINAL - 0.36 [0.014] THICK PHOSPHAR BRONZE PLATED WITH 1.27 μ m [0.00050] MINIMUM THICK GOLD IN LOCALIZED AREA, OVER 2.54 μ m [0.000100] MINIMUM THICK NICKEL UNDERPLATE.
WIRE HOLDER - POLYCARBONATE MAKROLON CLEAR.
SHIELD - BRASS DIN 17660 - CuZn33
2. DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
3. PLUG WILL ACCEPT A 24-26 AWG STRANDED CONDUCTOR, PROVIDED THE INSULATION CONDUCTOR DIAMETER IS WITHIN .89 - 1.09 [0.035 - .043]; WITH THE SUM OF DIAMETERS FOR ALL EIGHT CONDUCTORS WITHIN THE CABLE MUST NOT EXCEED 7.8MM [0.31 IN]. CABLE JACKET DIAMETER OF 5.0 -6.0MM [0.20-.24 IN].
4. TERMINATED DIMENSION 6.15 [0.242] MAXIMUM.
5. PACKAGE 1,000 ASSEMBLIES, 1,000 WIRE HOLDERS, AND 1,000 SHIELDS.
6. PACKAGE 100 ASSEMBLIES, 100 WIRE HOLDERS, AND 100 SHIELDS.
7. PACKAGE 25 ASSEMBLIES, 25 WIRE HOLDERS, AND 25 SHIELDS.
8. PACKAGE 500 ASSEMBLIES, 500 WIRE HOLDERS, AND 500 SHIELDS.
9. MODULAR PLUG BOOT, PART NUMBER 737893-X (X-DENOTES VARIOUS COLORS), MAY BE USED WITH KIT ASSEMBLY SHOWN.
10. UL RECOGNIZED: FILE NUMBER E81956.

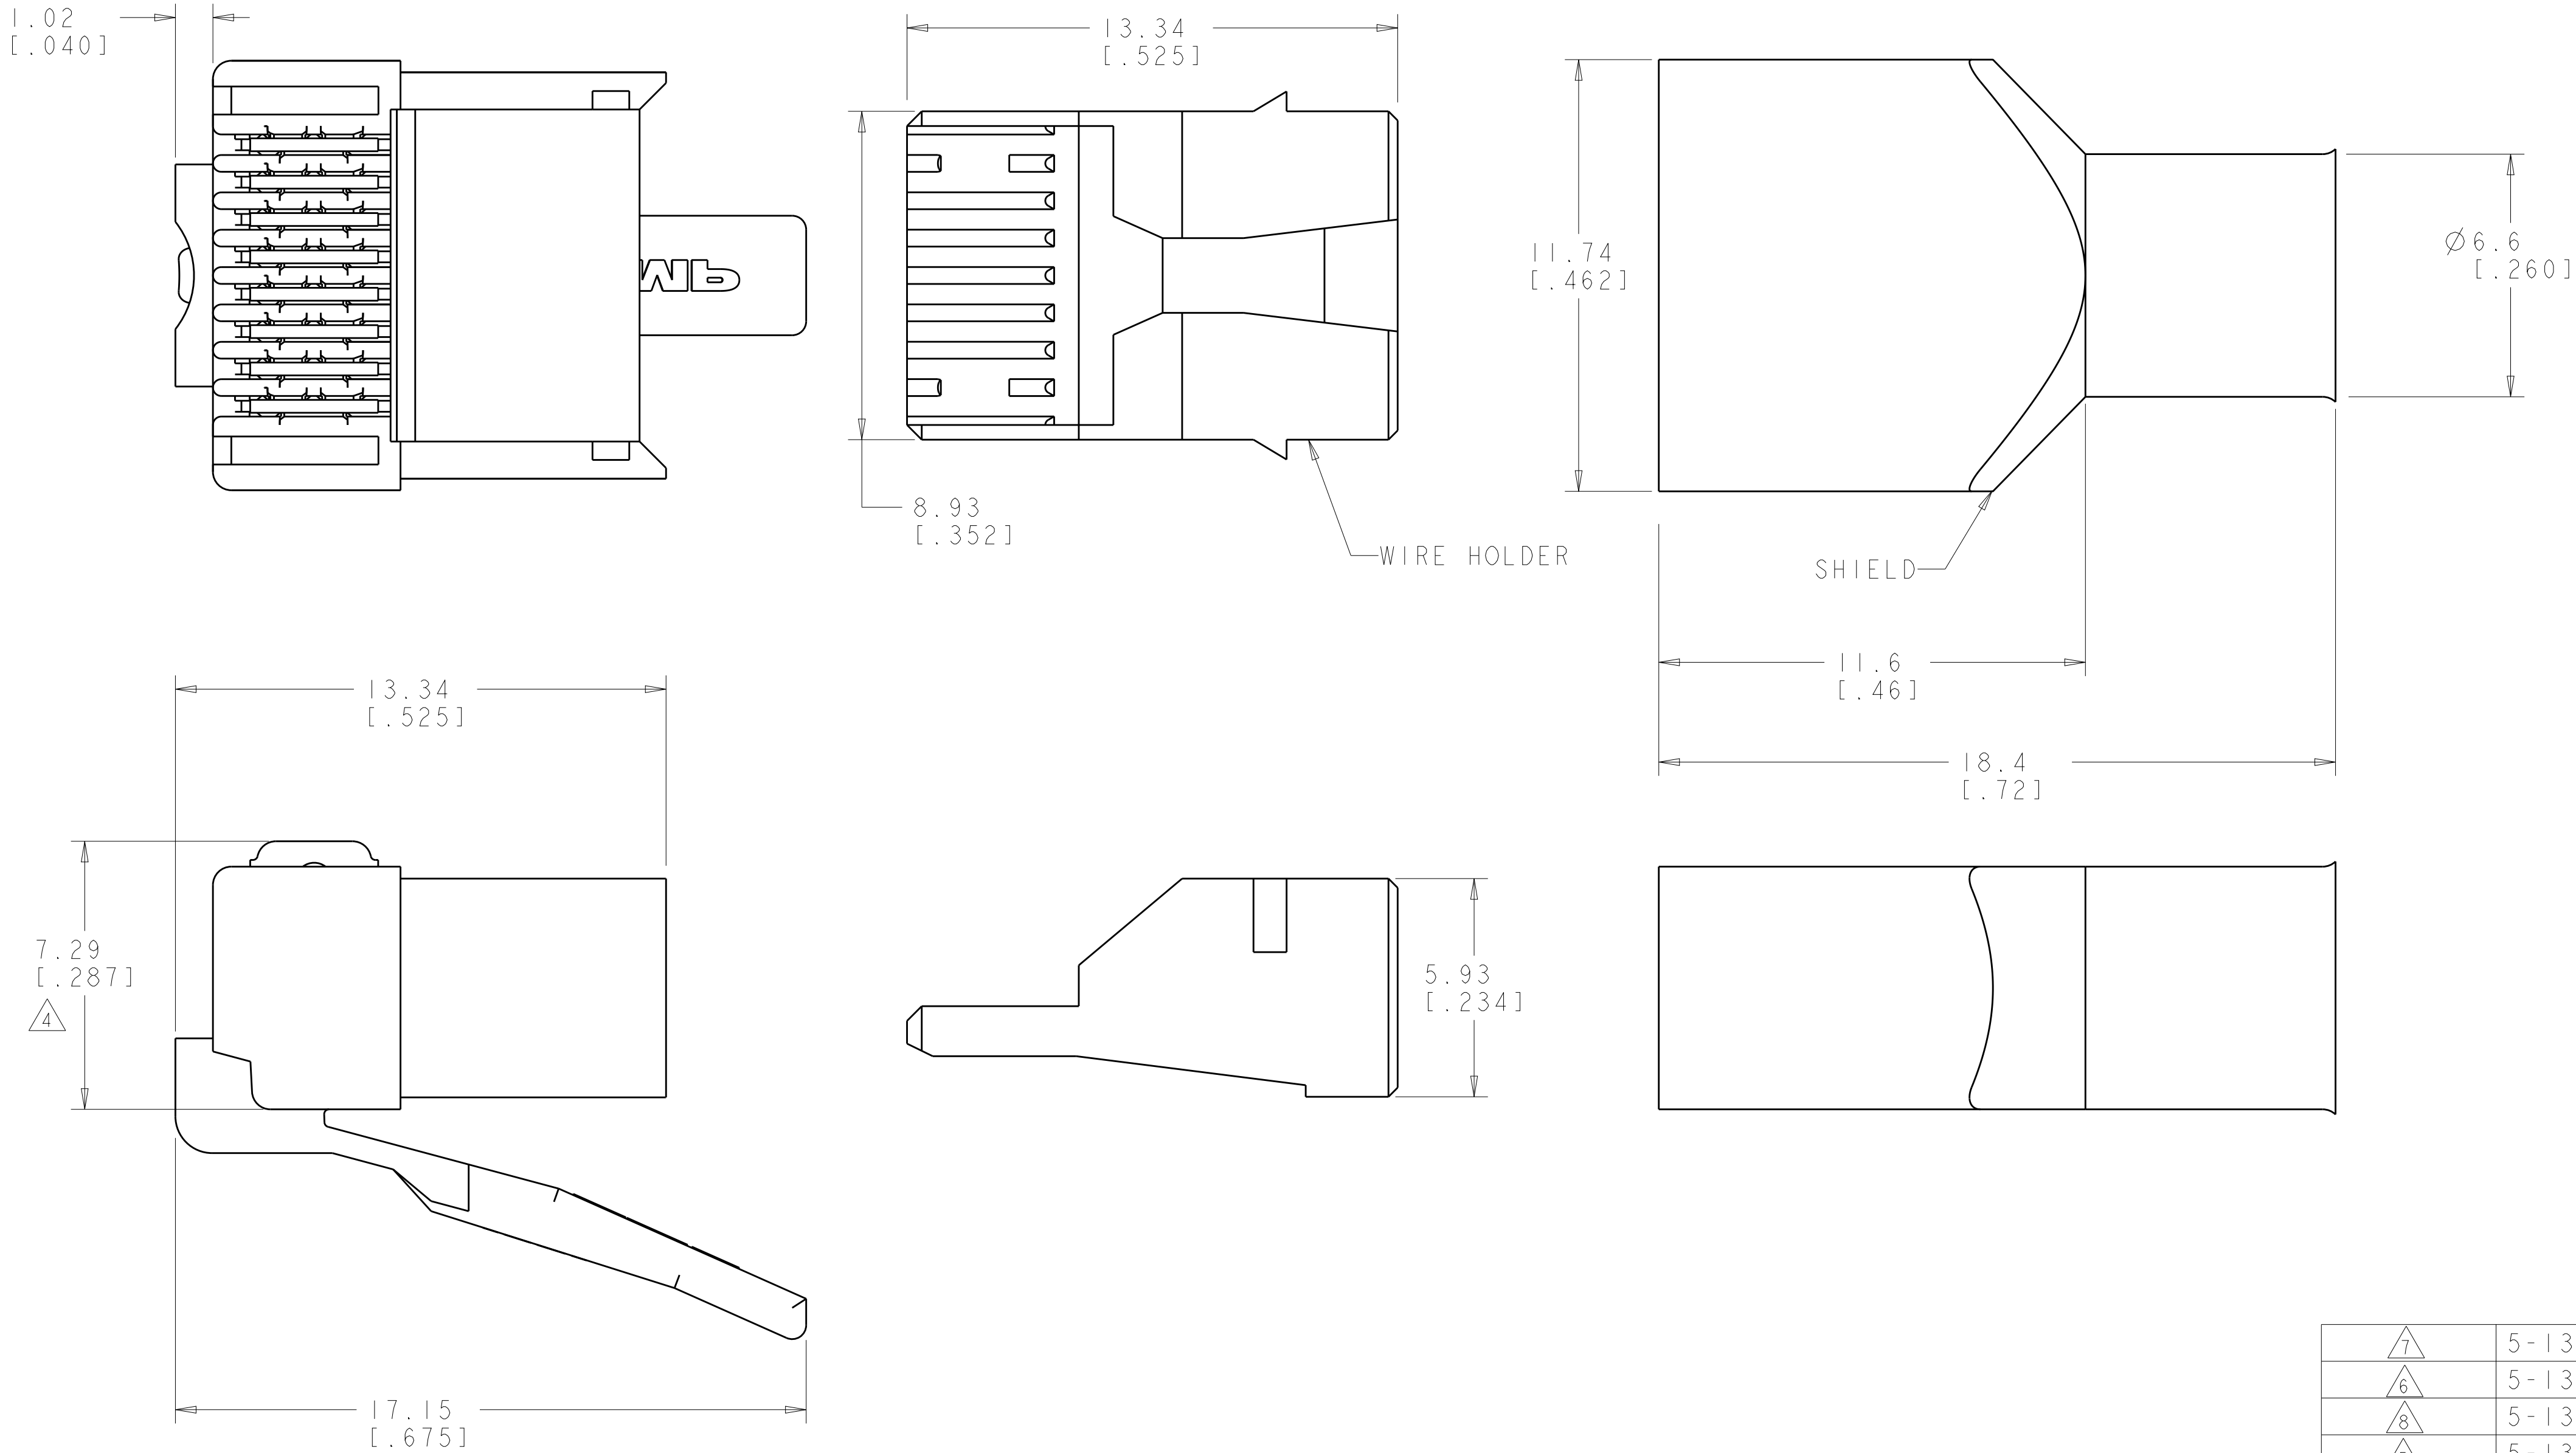

7	5-1375202-4
6	5-1375202-3
8	5-1375202-2
5	5-1375202-1
PACKAGE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN CL HALL 30JUL01		 TE Connectivity	
			CHK M. DELPHIAS 06AUG01			
DIMENSIONS: MME[INCHES]		TOL. EXCEPT UNLESS OTHERWISE SPECIFIED:		APVD M. DELPHIAS 06AUG01		NAME
				PRODUCT SPEC		
		0 PLC ± .		108-1990		KIT, 8 POSN,MOD PLUG, STRANDED WIRE, CAT 6
		1 PLC ± .		APPLICATION SPEC		
		3 PLC ± .		WEIGHT 14-13035		
		4 PLC ± .		SIZE CAGE CODE DRAWING NO		
MATERIAL		FINISH		RESTRICTED TO		
- 		- 		A100779C=1375202 -		
			CUSTOMER DRAWING		SCALE 8:1 SHEET 1 OF 1 REV F	