


## ENERGIZER CR1620



**Industry Standard Dimensions** mm (inches)

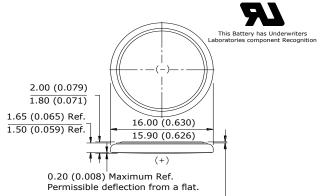


0.03 (0.001) Minimum Ref. (Applies to top edge of gasket or edge of crimp, whichever is higher.)

#### Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	<b>Typical Drains:</b> at 2.9V (mA)	Load (ohms)	<b>Cutoff</b> 2.0V (hours)
Continuous	0.097	30,000	814

### **Typical Discharge Characteristics**

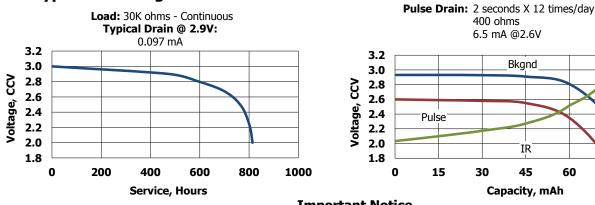

**Classification: Chemical System: Designation: Nominal Voltage: Typical Capacity:** 

**Typical Weight:** Typical Volume: Max Rev Charge: **Energy Density: Typical Li Content:** UL Recognized: **Operating Temp:** Self Discharge:

# Lithium Coin

### Specifications

"Lithium Coin" Lithium / Manganese Dioxide (Li/MnO<sub>2</sub>) ANSI / NEDA-5009LC, IEC-CR1620 3.0 Volts 79 mAh (to 2.0 volts) (Rated at 30K ohms at 21°C) 1.3 grams (0.04 oz.) 0.4 cubic centimeters (0.02 cubic inch) 1 microampere 164 milliwatt hr/g, 573 milliwatt hr/cc 0.043 grams (0.0015 oz.) MH29980 -30C to 60C ~1% / year






(1) KEEP OUT OF REACH OF CHILDREN. Swallowing may lead to serious injury or death in as little as 2 hours due to chemical burns and potential perforation of the esophagus. Immediately see doctor; have doctor phone (202) 625-3333.

(2) Battery compartment design. To prevent children from removing batteries, battery compartments should be designed with one of the following methods: a) a tool such as screwdriver or coin is required to open battery compartment or b) the battery compartment door/cover requires the application of a minimum of two independent and simultaneous movements of the securing mechanism to open by hand. Screws should remain captive with the battery door or cover.

### Internal Resistance Characteristics

Pulse Test at 21°C (70°F)

Bkgnd Drain: Continuous 30K ohms 0.097 mA @2.9V

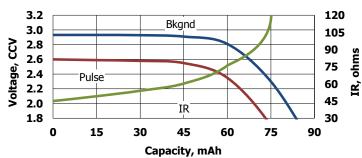

#### **Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication. ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.